




- NOTES:
1. MATERIAL OF CONSTRUCTION IS ALUMINUM.
 2. COATED IN 2-4 MILS OF DYNASTY BLUE POWDER COATING.
 3. INTERCOM, CAMERAS, ETC. TO BE PROVIDED BY CUSTOMER.
 4. LIGHTING REQUIRES CONNECTION TO INTERCOM FOR ACTIVATION.

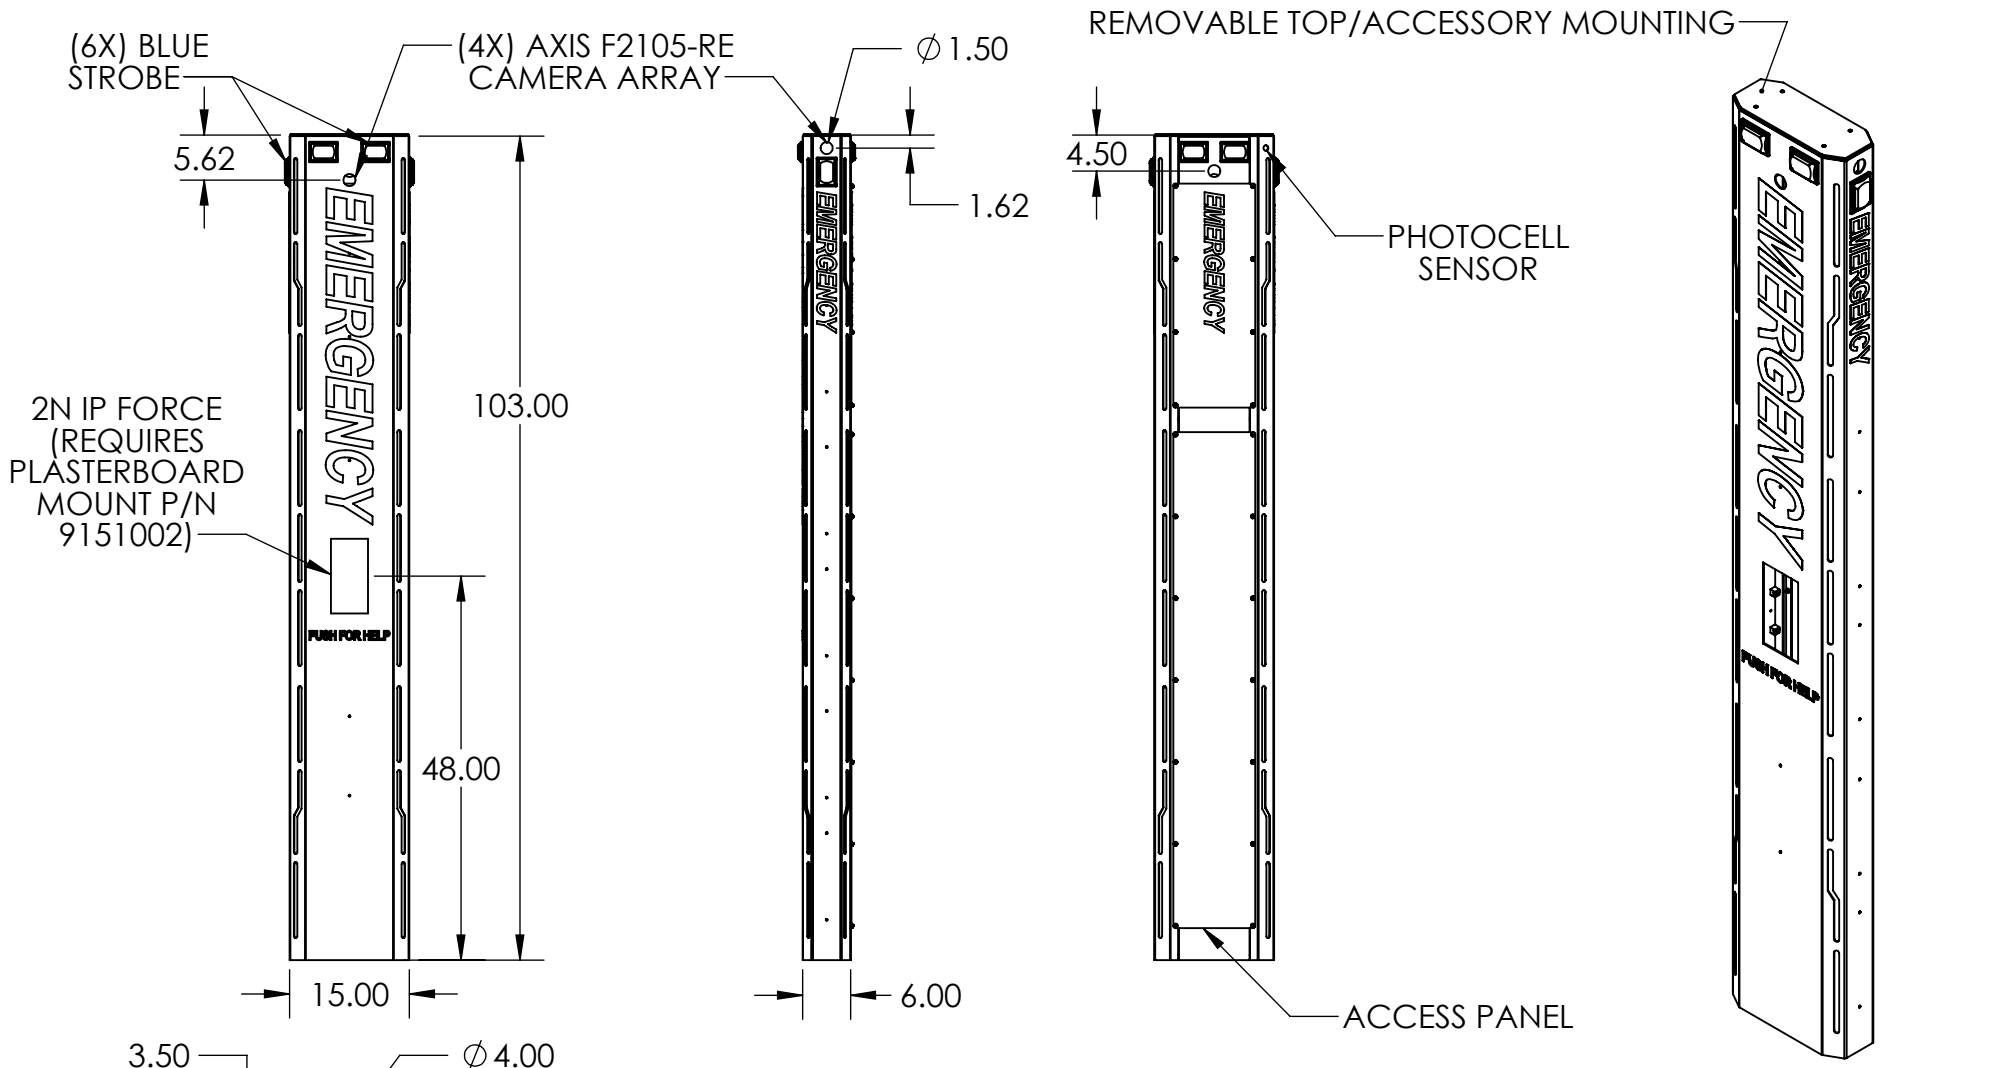

PEDESTALPRO.COM
1-800-660-3072

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL $\pm 1/32$
ANGULAR: $\pm 2^\circ$
TWO PLACE DECIMAL ± 0.010
THREE PLACE DECIMAL ± 0.005

INTERPRET GEOMETRIC
TOLERANCING PER:
ASME Y14.5 -2009


NAME	DATE
DRAWN	
CHECKED	
PROPRIETARY AND CONFIDENTIAL	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF PEDESTALPRO LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF PEDESTALPRO LLC IS PROHIBITED.	

TITLE:
INSTALLATION

THURSDAY, JUNE 19,
2025 2:11:18 PM

WEIGHT: 68.278

SIZE	PART NO.	REV
A	156TOW-AXIS-01-ALU	A
NO SCALE		SHEET 1 OF 21

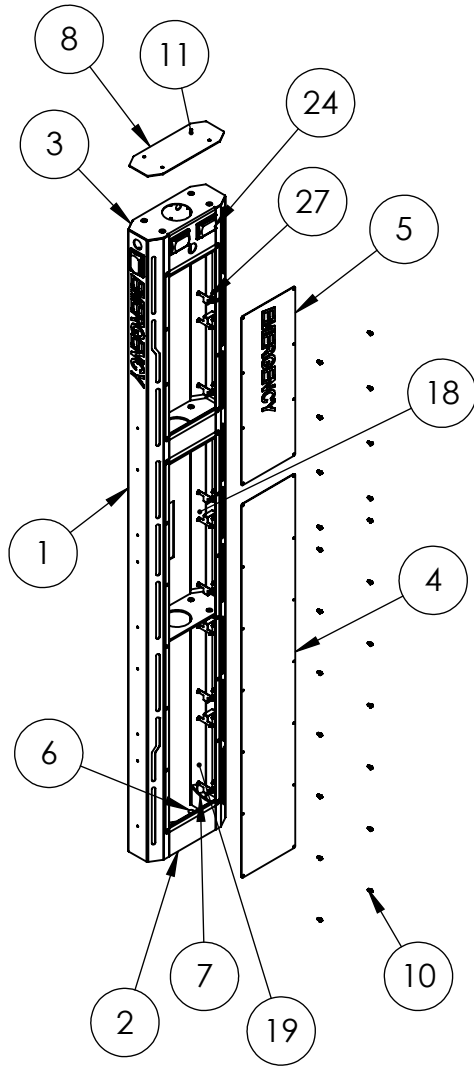

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	156TOW-AXIS-01-ALU BODY	ALUMINUM BODY	1
2	156TOW-AXIS-01-ALU CLOSURE	CLOSURE PANEL	2
3	156TOW-AXIS-01-ALU CAP	TOP CAP	1
4	156TOW-AXIS-01-ALU ACCESS LOWER	ACCESS PANEL	1
5	156TOW-AXIS-01-ALU ACCESS UPPER	ACCESS PANEL	1
6	156TOW-AXIS-01-ALU BASE	BASE PLATE	1
7	156TOW-AXIS-01-ALU STIFFENER	BASE STIFFENER	2
8	156TOW-AXIS-01-ALU TOP CAP	BLANK CAP	1
9	156TOW-AXIS-01-ALU RIB	INTERNAL BRACING PLATE	2
10	--	1/4-20 X 1/2 SS PAN HD SCREW	22
11	--	1/4-20 X 1" SS PEM STUD	4
12	--	1/4-20 NYLON LOCK NUT	4
13	--	1/4-20 X 1" FLAT WASHER	4
14	--	4-40 X 1/2" SS PAN HD SCREW	24
15	--	DIN MOUNTING RAIL BOTTOM	1
16	--	DIN MOUNTING RAIL UPPER & MID	2
17	156TOW-AXIS-01-ALU POLYCARB TOP	FROSTED POLYCARBONATE WINDOW	2
18	156TOW-AXIS-01-ALU POLYCARB MID	FROSTED POLYCARBONATE WINDOW	2
19	156TOW-AXIS-01-ALU POLYCARB BOTTOM	FROSTED POLYCARBONATE WINDOW	2
20	BRICK LIGHT	BLUE STOBE LED LIGHT	6
21	LARGE EMERGENCY DECAL	WHITE REFLECTIVE VINYL	1
22	MEDIUM EMERGENCY DECAL	WHITE REFLECTIVE VINYL	3
23	PUSH FOR HELP DECAL	WHITE REFLECTIVE VINYL	1
24	--	10-24 STAINLESS STEEL KEPS NUT	32
25	--	6-32 SS NYLON LOCK NUT	48
26	--	6-32 X 1/2" SS PEM STUD	48
27	BRA133-EMER-01-304	LIGHT BRACKET	12
28	--	10-24 X .75" SS PEM STUD	32
29	TOP-BOTTOM GASKET	SOFT NEOPRENE GASKET	4
30	LOWER SIDE GASKET	SOFT NEOPRENE GASKET	2
31	UPPER SIDE GASKET	SOFT NEOPRENE GASKET	2
33	AXIS F91 MOUNT	DEVICE MOUNT	1
34	2IN DIN RAIL	DIN MOUNTING RAIL	1
35	--	6-32 X 5/16" SS PEM STUD	2
36	--	6-32 FLANGE NUT	2



PEDESTALPRO.COM
1-800-660-3072

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL $\pm 1/32$
ANGULAR: $\pm 2^\circ$
TWO PLACE DECIMAL ± 0.010
THREE PLACE DECIMAL ± 0.005

INTERPRET GEOMETRIC
TOLERANCING PER:
ASME Y14.5 -2009

NAME	DATE
DRAWN	
CHECKED	

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
PEDESTALPRO LLC. ANY REPRODUCTION
IN PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF PEDESTALPRO LLC
IS PROHIBITED.

TITLE:

ASSEMBLY

THURSDAY, JUNE 19,
2025 2:11:18 PM

WEIGHT: 68.278

SIZE	PART NO.	REV
A	156TOW-AXIS-01-ALU	A
NO SCALE		SHEET 2 OF 21